

### Specifications


- 96 kHz 64 Bit Custom Pulse Array DAC
- WTA Custom Digital Filter
- Gold Plated 4 Layer SMD DAC PCB
- 1 x 44.1 kHz Optical Output
- 1 x Optical Clock Lock Input (128 x Fs)
- 1 x BNC Digital Clock Lock Output (1 x Fs)
- 4608 times oversampling
- Surface Mount Technology
- High Quality Transport Mechanism, Sony Dual Beam Laser
- "Ever-Warm" Standby for DAC & Tube Stage
- Universal Remote Control Handset (operates TT amplifiers)
- Class A Vacuum Tube Output Stage Milspec 6922 V.T.
- 1 pair RCA outputs @ 2.7 V RMS
- Vacuum Fluorescent Display (Disable Function)
- Supports CD Text

### DAC Connections

- 1 x Auto Sensing 44.1-96 kHz Optical Input
- 1 x Auto Sensing 44.1-96 kHz Digital Coax. Input
- 1 x BNC Digital Clock Lock Output (1 x Fs)

Available in Black or Silver  
or with optional Rostrum support system

Dimensions 410 x 320 x 112.5 mm (W,D,H)  
Weight = 10 Kg

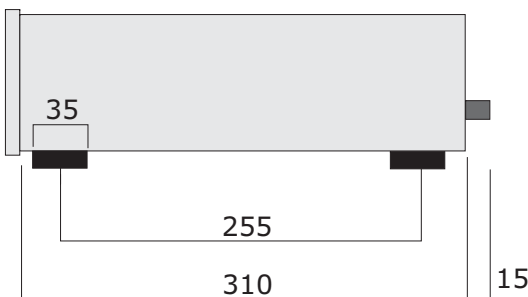

Rear Panel Layout

