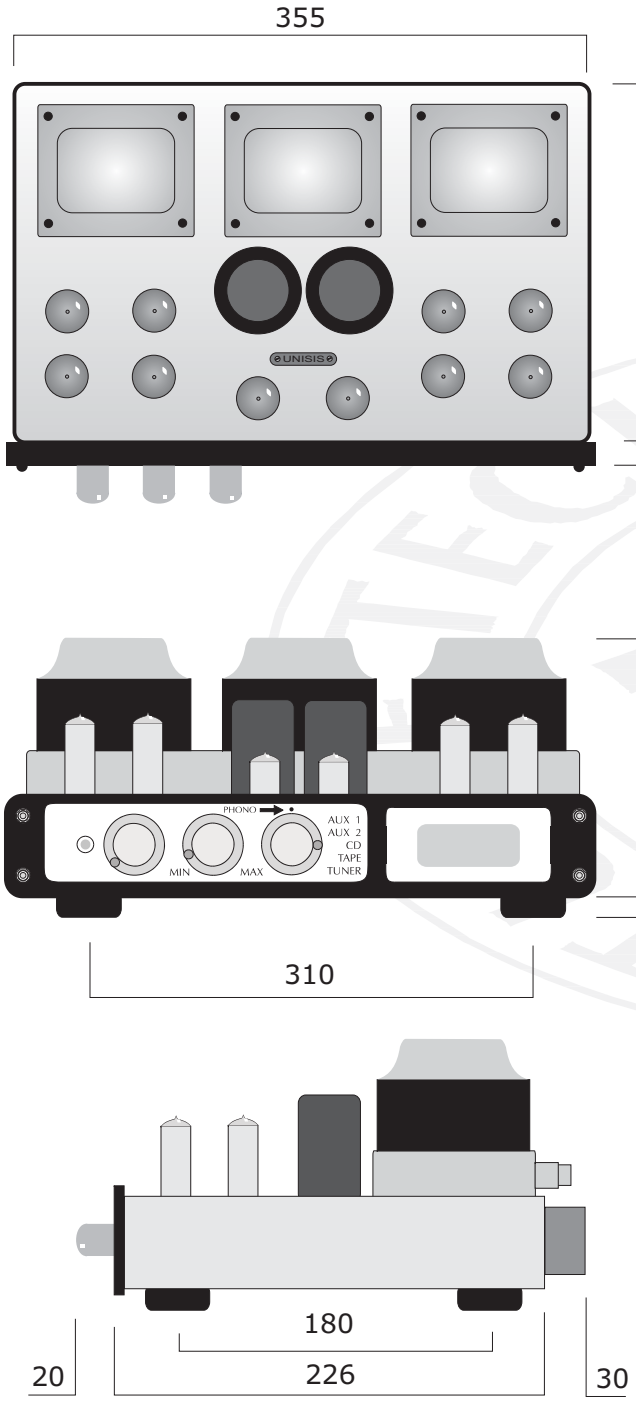

Specifications

No. of Inputs - 5 single ended inputs per channel (1 Record Output)
Input Sensitivity (Line) = 300mV RMS for max power @ 35W
Input Sensitivity (Phono) = 0.8mV RMS for max power @ 35W
Input Impedance (Line) = 250 kohms (Phono) = 47 kohms
Output Power = 35 watts RMS into 8 ohms
Nominal Speaker Load = 8 ohms
Rated Power Bandwidth = 12Hz - 58kHz @ 35W -1dB
Frequency Response = 6 Hz - 68kHz @ 1 W -1dB
Total Harmonic Distortion = 0.05% @ 1W
0.3% @ Half Power
1.0 % @ Full Power
Signal to Noise Ratio = -90dB unweighted, input shorted

Tube Compliment - 4 x EL84/6BQ5 pentode per channel
Tube Compliment (Line) 1 x ECC83/12AX7 twin triode /channel
Tube Compliment (Phono) 1 x ECC83/12AX7 twin triode /channel

Power Consumption: 125 W quiescent, 350 W full power @ 240V
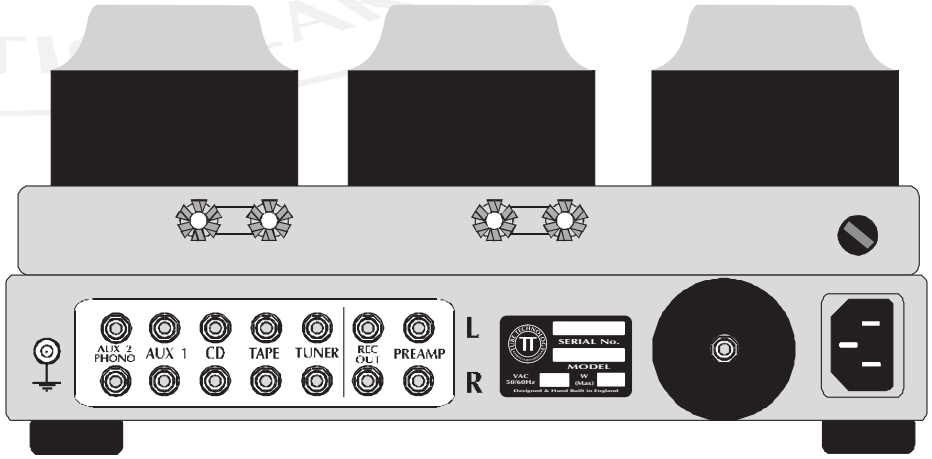
Dimensions - 355 x 226 x 198 mm (W,D,H)
Weight - 16 kg